




A 2VM RF 1

Remote Mounting Manifold

These calibration manifolds are having one isolating valve of 1/2" connection & one drain valve of 1/4" NPTF out let which can be used for calibration. Compact unit saves space, reduces number of joints resulting in cost reduction. Used with pressure gauges, pressure switches & transmitters. Different options as shown.

A 2VM RF 1

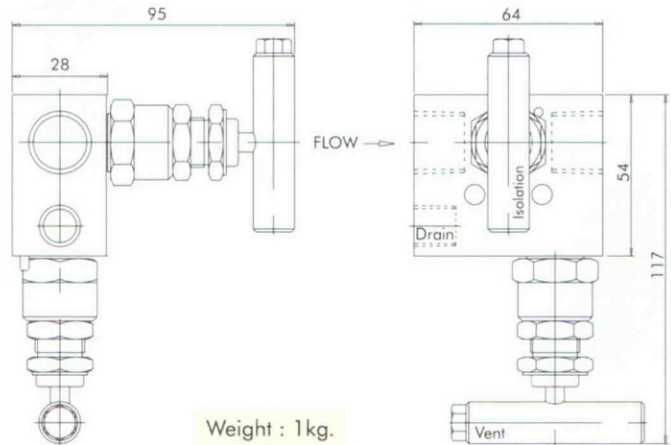

Weight : 1kg.



STANDARD SPECIFICATIONS :

Maximum Working Pressure : 400 bar/6000 PSI

Maximum Temperature : 240° C

Material : Stainless steel 304, 316, 316L/ Carbon steel & other metal alloys

Gland Packing : PTFE

Standard Process Connection : 1/2" NPT

Standard Instrument Connection : 1/2" NPT

Drain : 1/4" NPT

(See Pressure temperature chart on page no : 2)