

(A 2VM RF 3)



ISO 9001 : 2008 | PED 97/23/EC

Standard Specifications :

Maximum working pressure : 413 bar / 6000 PSI at 100° C
(see pressure temperature chart on Page No. 4 for higher temperature applications)

Material : 316 SS / 316L SS / 304 SS / Carbon steel

MOC in accordance with NACE MR0175 is available on request.



Gland packing : PTFE / Graphite

Standard process connection : 1/2" NPT F

Standard instruments connection : 1/2" NPT F

Drain : 1/4" NPT F (supplied with 1/4" NPT blind plug)

Weight : 1.10 kg

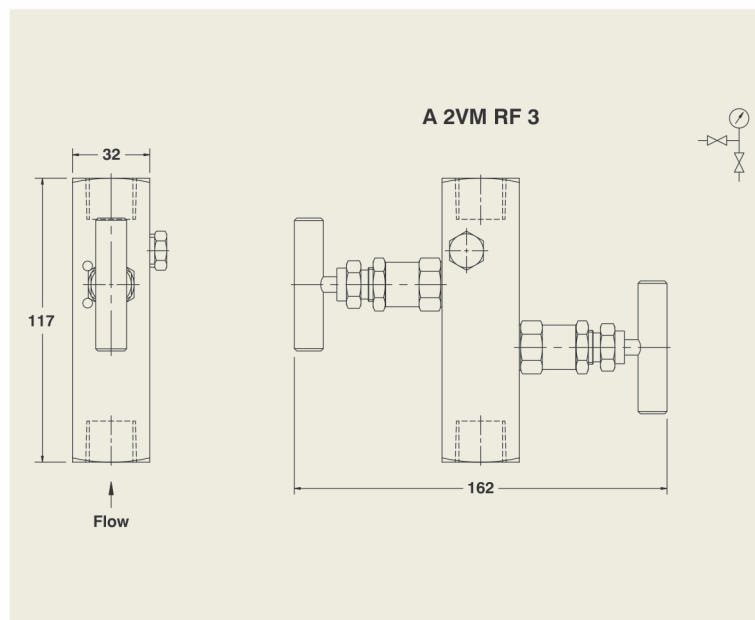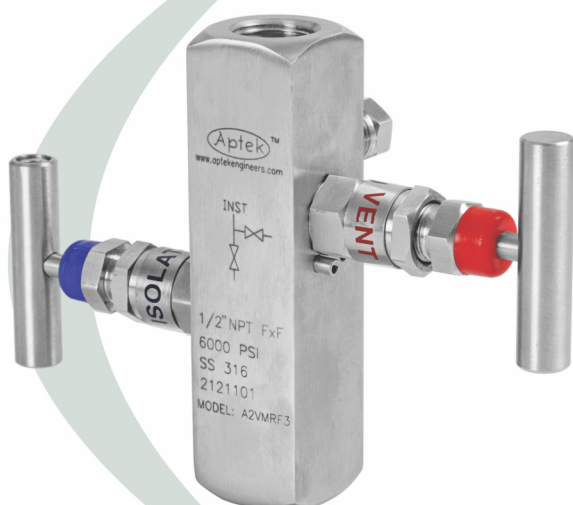

(A 2VM RF 4)

Standard Specifications :

Maximum working pressure : 413 bar / 6000 PSI at 100° C

(see pressure temperature chart on Page No. 4 for higher temperature applications)

Material : 316 SS / 316L SS / 304 SS / Carbon steel

MOC in accordance with NACE MR0175 is available on request

Monel, Inconel, Hastelloy, Duplex steel are also available on request.

Gland packing : PTFE / Graphite

Standard process connection : 1/2" NPT F

Standard instruments connection : 1/2" NPT F

Drain : 1/2" NPT F (supplied with 1/2" NPT blind plug)

Weight : 1.10 kg

